

NT1000

Ultra Versatile 1" Studio Condenser Microphone

RØDE[®]
MICROPHONES




Features

- HF2 1" capsule with gold-plated diaphragm
- Ultra low noise transformerless circuitry
- Cardioid polar pattern
- Durable satin nickel finish
- High strength welded and heat-treated mesh head
- Internal capsule shock mounting
- True condenser (externally biased)
- Full frequency response
- Designed and manufactured in Australia
- Full 10 year warranty*


Specifications

Acoustic Principle	Pressure gradient	Directional Pattern	Cardioid
Frequency Range	20 Hz-20 kHz	Sensitivity	-36 dB re 1 Volt/Pascal (16 mV @ 94 dB SPL) +/- 2 dB @ 1kHz
Output Impedence	100Ω	Dimensions	Length - 209mm (8.2283") Diameter - 54mm (2.1259")
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)	Shipping Weight	980g
Net Weight	682g		

Polar Pattern



Frequency Response

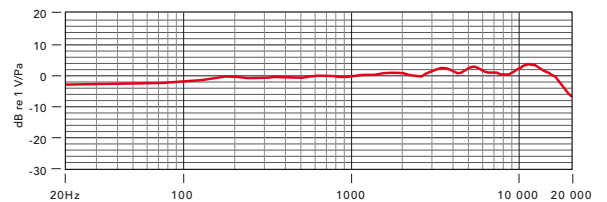

Included Accessories

- ZP1 zip pouch
- RM2 stand mount



www.rodemic.com

*After online registration

Australia
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
PO Box 4189 Santa Barbara CA 93140 USA
Ph: +1 805 566 7777 Fx: +1 805 566 0071